


KENWOOD

Listen to the Future



TK-U100

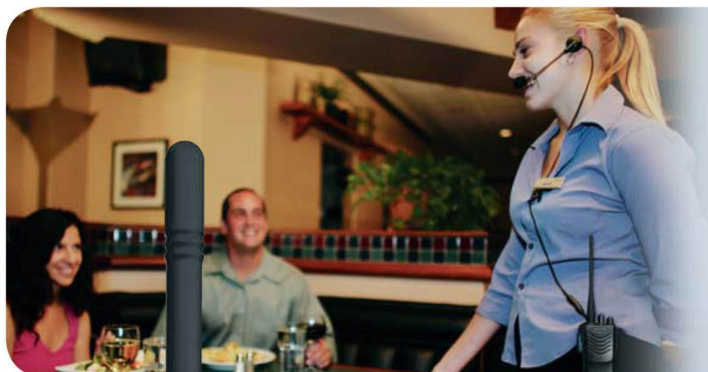

The Thin Edge

Slim, thin and light – Kenwood's TK-U100 is supremely easy to handle and to operate. Yet this handy compact radio is extremely reliable, meeting the famously tough MIL-STD 810 C/D/E/F and G specifications. With its well-balanced performance, it makes perfect business sense – especially for inventory control and service industry operations.

Thin & Lightweight

Thinner and lighter – the TK-U100 is ideal for hooking on a belt or even slipping into a coat pocket. The slim design fits neatly in your hand and it weighs only 203g with the Li-Ion battery.



16 Channels with Scan Function

This compact, user-friendly portable offers a total of 16 channels, and each can be assigned a QT and DQT tone key to eliminate unwanted signals. You can also assign the 16th channel, if free, to the scan function. This added convenience means that the PF key is freed up for some other function.

Programmable Function Key with Hold

The side PF key can be programmed for enhanced operating ease, while the adjustable Hold feature doubles the number of functions at your finger tips.

All-in-one Package

The TK-U100 is ready for use immediately after purchase. It comes with all necessary accessories, including a charger, battery pack and antenna. A handy belt clip is also provided. There is no need to buy extra accessories for normal operation.

Supplied Accessories



Robust & Reliable

The TK-U100 is built to survive hard knocks, drops and all-weather environments. It meets or exceeds the stringent IP54 dust and water intrusion standards as well as the MIL-STD 810 C, D, E, F & G environmental standards.

OTHER FEATURES

- Output Power 4W (UHF) • QT / DQT
- DTMF Enc. (PTT ID, Autodial) • Priority Scan
- Windows® Programming and Tuning
- Wide/Narrow Channel Bandwidth
- VOX ready • Battery-Saver
- Busy Channel Lockout • Time-Out-Timer
- Low-Battery Alert • Tri-Colour LED • Wired Clone



Options

- **KNB-63L**
Li-Ion Battery
(7.2V, 1,100 mAh)



- **KSC-35S**
Regular Charger



- **KRA-22**
VHF Low Profile
Helical Antenna



- **KRA-23**
UHF Low Profile
Helical Antenna



- **KRA-26**
VHF Helical Antenna



- **KRA-27**
UHF Whip Antenna



- **KMC-45**
Speaker Microphone



- **KMC-21**
Compact Speaker
Microphone



- **KHS-1**
Headset
with VOX/PTT



- **KHS-21**
Headset



- **KWR-1**
Water Resistant Bag



All accessories and options may not be available in all markets. Contact an authorized Kenwood dealer for details and complete list of all accessories and options.

Specifications

GENERAL

Frequency Range	400 - 430 MHz	
Number of Channels	16 channels	
Channel Spacing	Wide / Narrow	
Wide / Narrow	25 kHz / 12.5 kHz	
Channel Step	5, 6.25 kHz	
Operating Voltage	7.5 V DC \pm 20 %	
Battery Life (5-5-90 duty cycle, save off)	with KNB-63L	
with KNB-63L	Approx. 10 hours	
Operating Temperature	-20°C ~ +60°C	
Frequency Stability	2.5 ppm	
Antenna Impedance	50 Ω	
Channel Frequency Spread	40 MHz	
Dimensions (W x H x D), Projections not Included	Radio only	
with KNB-63L	54 x 113 x 14 mm	
Weight (net)	Body only	
with KNB-63L	Approx. 130 g	
FCC ID	Approx. 203 g	
Type 1	ALH437200	ALH437300
Type 2	—	ALH437301
FCC Compliance	Parts 15 / 90	Parts 15 / 90

RECEIVER

Sensitivity (12 dB SINAD)	Wide / Narrow	0.25 μ V / 0.28 μ V
Selectivity	Wide / Narrow	70 dB / 60 dB
Intermodulation Distortion	Wide / Narrow	65 dB / 60 dB
Spurious Response	60 dB	
Audio Distortion	Less than 5 %	
Audio Output	500 mW / 8 Ω	

TRANSMITTER

RF Power Output (High / Low)	4 W / 1 W	
Spurious Response	65 dB	
Modulation	Wide / Narrow	16K0F3E / 11K0F3E
FM Hum & Noise	Wide / Narrow	45 dB / 40 dB
Audio Distortion	Less than 5 %	

Measurements made per TIA/EIA 603 and specifications shown are typical. Kenwood follows a policy of continuous advancement in development. For this reason specifications may be changed without notice.

Windows® is a registered trademark of Microsoft Corporation.

Applicable MIL-STD & IP

Standard	MIL 810C Methods/Procedures	MIL 810D Methods/Procedures	MIL 810E Methods/Procedures	MIL 810F Methods/Procedures	MIL 810G Methods/Procedures
Low Pressure	500.1/Procedure I	500.2/Procedure I, II	500.3/Procedure I, II	500.4/Procedure I, II	500.5/Procedure I, II
High Temperature	501.1/Procedure I, II	501.2/Procedure I, II	501.3/Procedure I, II	501.4/Procedure I, II	501.5/Procedure I, II
Low Temperature	502.1/Procedure I	502.2/Procedure I, II	502.3/Procedure I, II	502.4/Procedure I, II	502.5/Procedure I, II
Temperature Shock	503.1/Procedure I	503.2/Procedure I	503.3/Procedure I	503.4/Procedure I, II	503.5/Procedure I
Solar Radiation	505.1/Procedure I	505.2/Procedure I	505.3/Procedure I	505.4/Procedure I	505.5/Procedure I
Rain	506.1/Procedure II	506.2/Procedure II	506.3/Procedure II	506.4/Procedure III	506.5/Procedure III
Humidity	507.1/Procedure I, II	507.2/Procedure II, III	507.3/Procedure II, III	507.4	507.5/Procedure II
Salt Fog	509.1/Procedure I	509.2/Procedure I	509.3/Procedure I	509.4	509.5
Dust	510.1/Procedure I	510.2/Procedure I	510.3/Procedure I	510.4/Procedure I, III	510.5/Procedure I
Vibration	514.2/Procedure VIII, X	514.3/Procedure I	514.4/Procedure I	514.5/Procedure I	514.6/Procedure I
Shock	516.2/Procedure I, II, V	516.3/Procedure I, IV	516.4/Procedure I, IV	516.5/Procedure I, IV	516.6/Procedure I, IV

International Protection Standard

- **Dust & Water Protection** IP54

To meet MIL810 and IP54, the 2-pin connector cover has to be connected.

Listen to the Future

Kenwood has always connected with people through sound. Now we want to expand the world of sound in ways that only Kenwood can, listening to our customers and to the pulse of the coming age as we head toward a future of shared discovery, inspiration and enjoyment.

JVCKENWOOD Singapore

1 Ang Mo Kio Street 63, Singapore 569110

<http://sg.jvckenwood.com>

<http://inexedge.kenwood.com>



ISO9001 Registered
Professional System Segment
JVCKENWOOD Corporation